SM and MM Loopback Patchcord

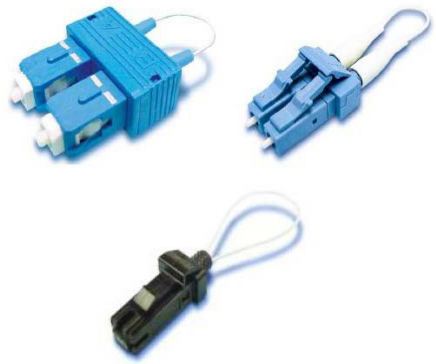

Features

- Low Insertion Loss
- Comply with RoHS
- Comply with Telcordia GR-326-CORE
- Comply with JIS C5970/C5973

Applications

- Telecommunications
- FTTH, CATV, LAN

Patchcord/Pigtail SPECIFICATIONS

Fiber Type		Single Mode 9/125um	Multimode 50/125 or 62.5/125
Connector Type		SC, LC, MTRJ	SC, LC, MTRJ
Insertion Loss (Typical)		≦1.0dB	≦0.2dB
Insertion Loss (Max.)		≦1.5dB	≦0.7dB
Return Loss	PC	≧45dB	≧35dB
	SPC	≧50dB	-
	UPC	≧55dB	-
	APC	≧65dB	-
Mating Durability (500cycles)		≦0.2dB	
Operating Temperature		-40~80°C	

W S C D 4 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Configuration
4=Loopback Patchcord
X=others

Fiber Type.
1=9/125um
2=50/125um
3=62.5/125um
X=others

Cable Type
1=Simplex,250um
2=Simplex,0.9mm
3=Simplex,2mm
5=Simplex,3mm
X=others

Cable Length
010=10cm
020=20cm
100=100cm
200=200cm
.....
XXX=others

Connector 1
0=None
S=SC
L=LC
R=Female MTRJ
J=Male MTRJ
X=others

Return Loss Grade
P=PC
S=SPC
U=UPC
A=APC
X=others

Connector 2
0=None
S=SC
L=LC
R=Female MTRJ
J=Male MTRJ
X=others

Return Loss Grade
P=PC
S=SPC
U=UPC
A=APC
X=others

WANSHING OPTICAL CO., LTD
3F No.53, Sec 2, Jhonghua Rd., Sinjhuang City,
Taipei County 24246, TAIWAN, R.O.C.
HOMEPAGE: http: www.wanshing.com.tw e-mail: info@wanshing.com.tw