Polarization Maintaining Wideband Circulator

Features

- High Isolation
- Low Insertion
- Comply with RoHS

Applications

- Telecommunications
- FTTH, CATV, LAN

PM Wideband Circulator SPECIFICATIONS

PARAMETERS	W Grade
Operating Wavelength	1570nm
Bandwidth	±50nm
Isolation (Typical)	≧40dB(47)
Insertion Loss (Typical)	≦0.9dB(0.6)
Return Loss	≧50dB
Min. Extinction Ratio	≧22dB
Min. Cross Talk	≧50dB
Operating Temperature	-5~70 ℃
Storage Temperature	-40~85℃
Max. Power	500mW

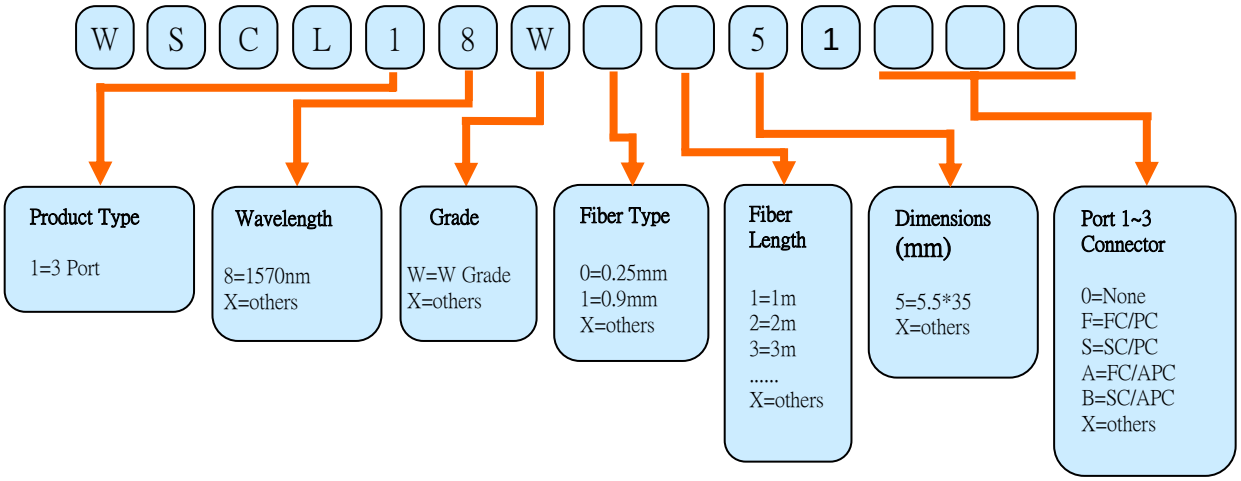

WANSHING OPTICAL CO., LTD
3F No.53, Sec 2, Jhonghua Rd., Sinjhuang City,
Taipei County 24246, TAIWAN, R.O.C.
HOMEPAGE: http: www.wanshing.com.tw e-mail: info@wanshing.com.tw