Hybrid SM and MM Adaptor

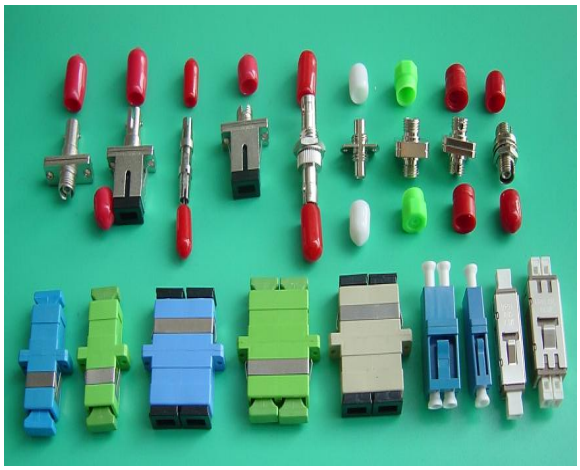

Features

- Comply with RoHS
- Comply with JIS and IEC Standards
- Precision Mechanical Dimensions

Applications

- Telecommunications
- FTTH, CATV , LAN

Female to Female SPECIFICATIONS

PARAMETERS		SM Type	MM Type
Material		Zirconia Ceramic Sleeve	Phosphor Bronze Sleeve
Max. IL (Typical)		≦0.2dB (<0.1dB)	≦0.3dB (<0.15dB)
Retention Force	FC, SC, ST Type	200~600 grams	200~600 grams
	LC Type	100~250 grams	100~300 grams
Durability (500 matings)		0.15dB Max. Increase	
Operating Temperature		-40~80°C	
Storage Temperature		-40~80°C	

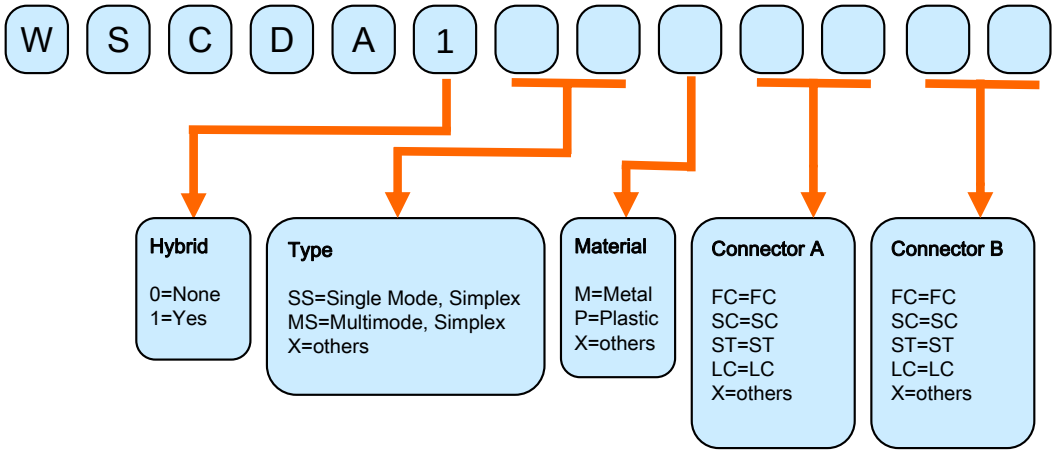

WANSHING OPTICAL CO., LTD
3F No.53, Sec 2, Jhonghua Rd., Sinjhuang City,
Taipei County 24246, TAIWAN, R.O.C.
HOMEPAGE: http: www.wanshing.com.tw e-mail: info@wanshing.com.tw